


# SAFETY RELIEF VALVE - WEIGHT & LEVER OPE.

MODEL NO. - FT-300

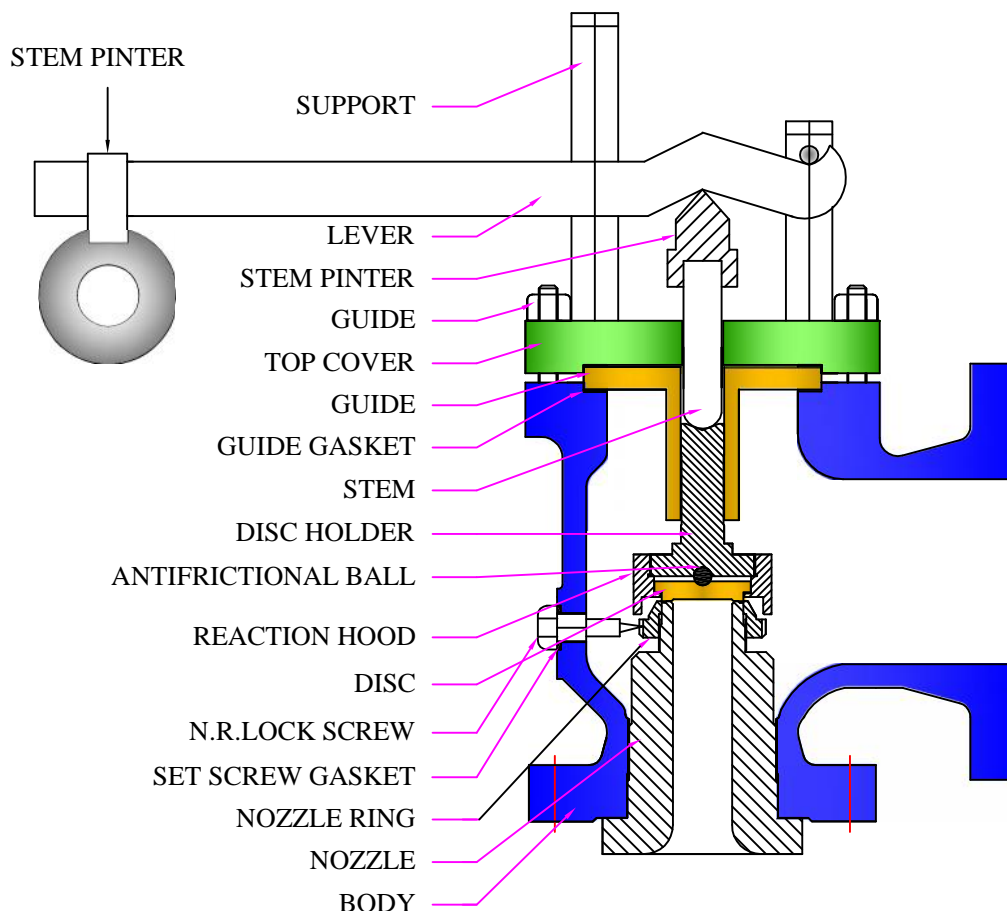

## TECHNICAL SPECIFICATION :

Flow-Tek Safety Relief Valves Are Designed As Per API-526 & API-520. & Tested : API-527. They Are In Conventional or Bellows Seal design. open or Closed Bonnet type, Plain or Packed Lever Arrangement. The Excellent Arrangement of Nozzle, Nozzle Ring, Disc & Spring Makes it Possible to discharge the Fluid so as to maintain a Predetermined Safe Pressure in the Vessel or System. The Valve Is Characterized by a rapid Full-opening action.

VALVE SIZE - INCH	1" x 2"	1-1/2" x 2"	1-1/2" x 2-1/2"	1-1/2" x 3"	2" x 3"	2-1/2" x 4"	3" x 4"	4" x 6"	6" x 8"	8" x 10"	10" x 14"	12" x 14"
VALVE SIZE - mm	25 x 50	40 x 50	40 x 65	40 x 80	50 x 80	65 x 100	80 x 100	100 x 150	150 x 200	200 x 250	250 x 350	300 x 350
A	105.0	124.0	124.0	130.0	133.0	136.5	155.0	181.0	240.0	276.0	380.0	380.0
B	114.5	120.5	120.5	124.0	124.0	143.0	162.0	229.0	241.0	280.0	370.0	370.0



## FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,  
KATHWADA, AHMEDABAD - 382430  
(M) : 09824080899, 09824539702  
PHONE : (079) 22900220, 22900219  
E-MAIL : [info@flowagevalves.com](mailto:info@flowagevalves.com), [hemal21386@gmail.com](mailto:hemal21386@gmail.com)  
url : [www.delugecontrolvalve.com](http://www.delugecontrolvalve.com), [www.flowagevalves.com](http://www.flowagevalves.com)  
AN ISO 9001:2008 CERTIFIED COMPANY