


# DIAPHRAGM VALVE (RUBBER LINED)

**APPLICABLE STANDARD**

DESIGN STD. : BS 5156  
 TESTING STD. : BS 5156  
 RATING : 150#/ 300#/ 600#  
 DRILLING : AS PER ANSI B 16.5  
 FACE TO FACE : AS PER ANSI B 16.10  
 OPERATION : HAND WHEEL OPERATED  
 END CONN. : FLANGED END

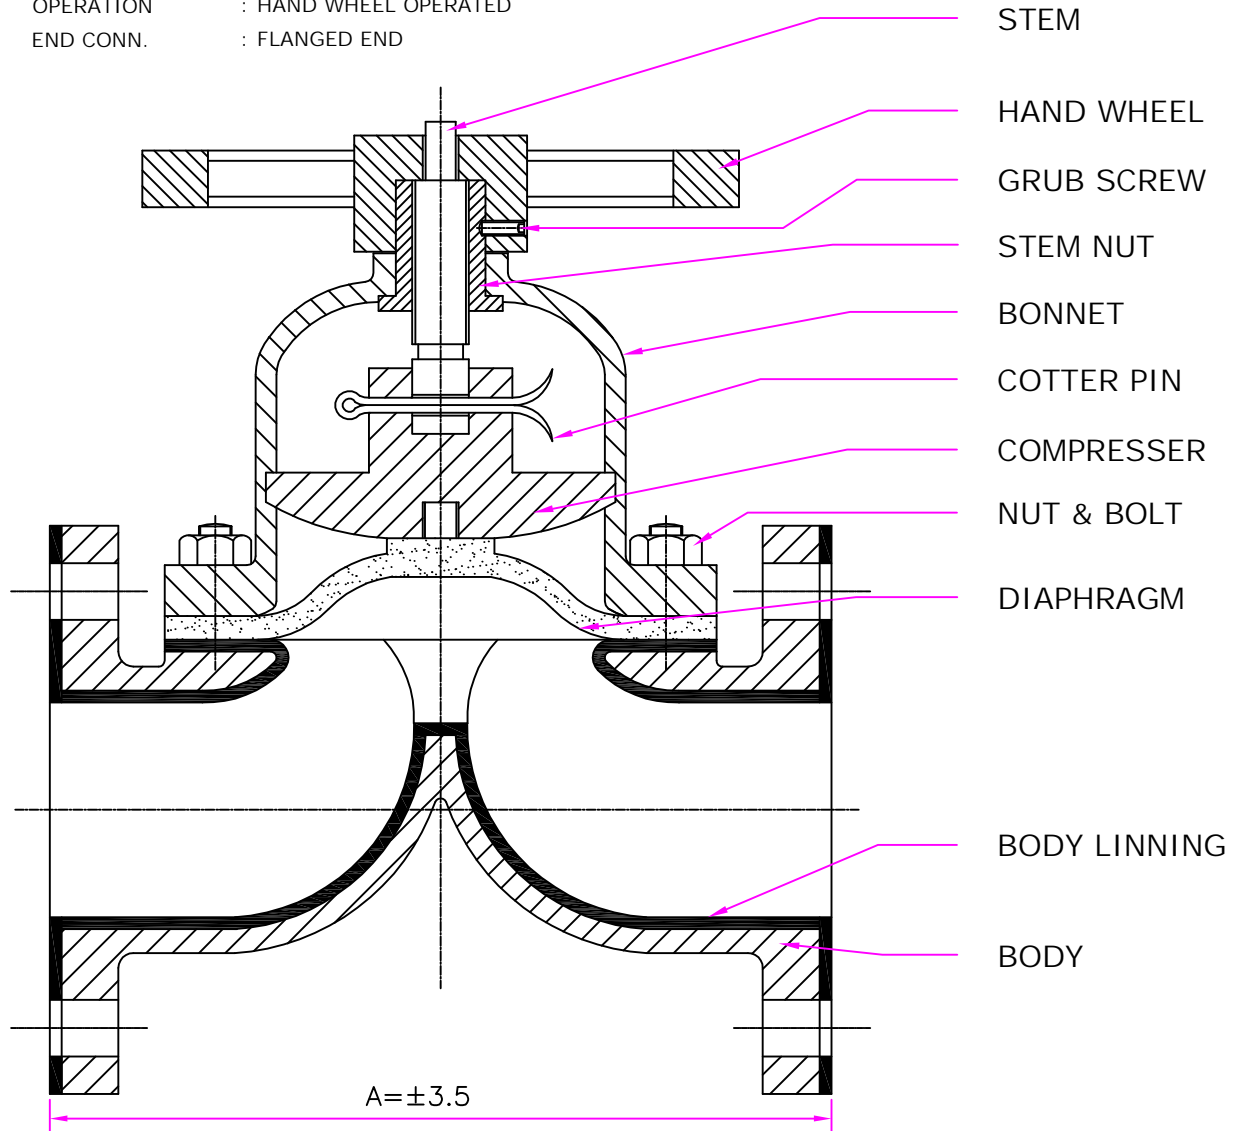

VALVE SIZE - INCH	1/2"	3/4"	1"	1 1/4"	1.5"	2"	2.5"	3"	4"	5"	6"	8"
VALVE SIZE - MM	15	20	25	32	40	50	65	80	100	125	150	200
A	150#	114	123	133	152	165	196	222	260	311	412	532



**FLOW-TEK VALVES & CONTROLS INC**

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,  
 KATHWADA, AHMEDABAD - 382430  
 (M) : 09824080899, 09824539702  
 PHONE : (079) 22900220, 22900219  
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com  
 url : www.delugecontrolvalve.com, www.flowagevalves.com  
 AN ISO 9001:2008 CERTIFIED COMPANY