
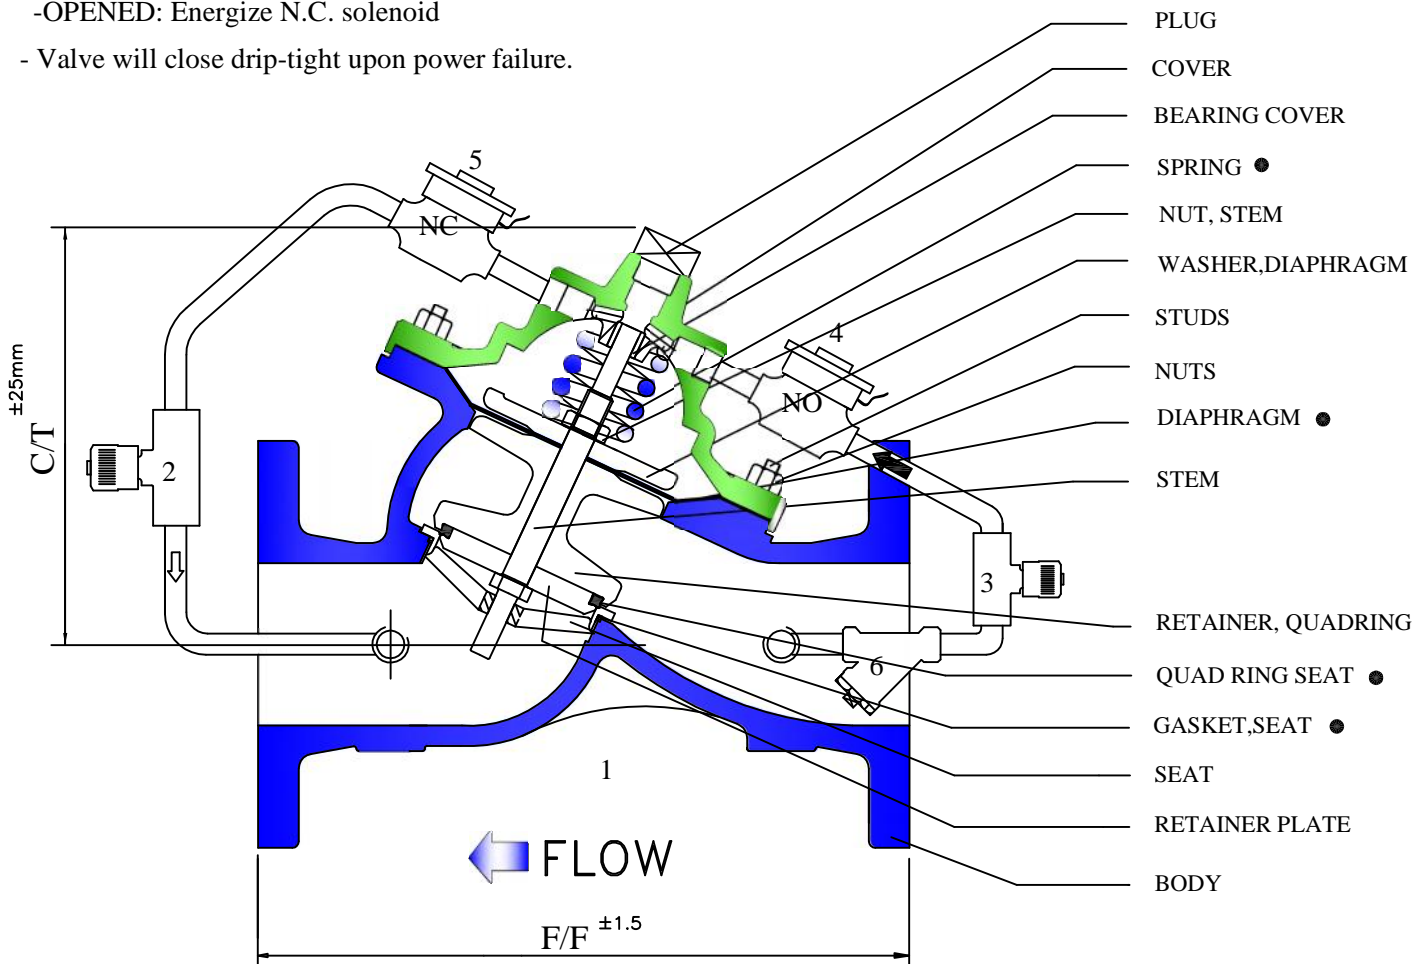


# DIGITAL CONTROL VALVE/SET STOP VALVE

## FT-2113 - 40R - 'Y' -TYPE

### TECHNICAL SPECIFICATION :

- Valve opens when power is supplied to both solenoids
- Valve is held in position when N.O.solenoid is energized and N.C. solenoid is de-energized.
- From the "hold position" the valve may be positioned as follows:
  - CLOSED: De-energize N.O. solenoid
  - OPENED: Energize N.C. solenoid
- Valve will close drip-tight upon power failure.



### COMPONENTS

- 1 - BASIC VALVE
- 2 - NEEDLE VALVE - Adj. closing speed
- 3 - NEEDLE VALVE - Adj. Opening speed
- 4 - 2-WAY SOLENOID VALVE - Normally open
- 5 - 2-WAY SOLENOID VALVE - Normally Closed
- 6 - STRAINER-'Y' TYPE

### ● RECOMMENDED SPARE

VALVE SIZE - INCH	2"	3"	4"
VALVE SIZE - mm	50	80	100
F/F (150 ANSI)	238	305	345
F/F (300 ANSI)	250	324	360
C/T Max.-F100	150	196	250



### FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,  
 KATHWADA, AHMEDABAD - 382430  
 (M) : 09824080899, 09824539702  
 PHONE : (079) 22900220, 22900219  
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com  
 url : www.delugecontrolvalve.com, www.flowagevalves.com  
 AN ISO 9001:2008 CERTIFIED COMPANY