


FS GLOBE VALVE

OPERATION. - HAND WHEEL OPERATED

APPLICABLE STANDARD

DESIGN STD.	: API 602
TESTING STD.	: API 598
LEAKAGE CLASS	: CLASS IV
RATING	: 150#
DRILLING	: ANSI B 16.5
FACE TO FACE	: AS PER ANSI B 16.10
END CONN.	: SOCKET WELD/ SCREWED END

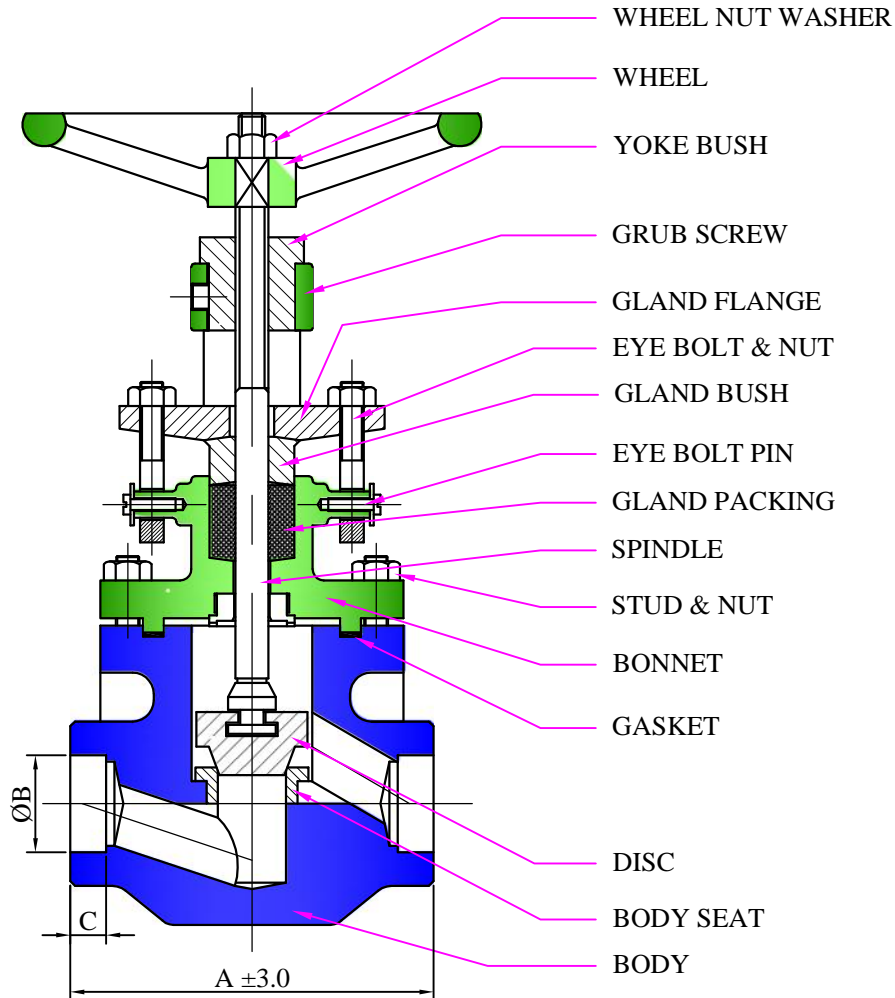

VALVE	SIZE Ø RT	A	Ø B	C	CLASS
15 NB	9	85	21.7	9.5	150 #
20 NB	12.5	92	27.1	13	
25 NB	17.5	104	33.8	13	
40 NB	27	127	48.6	13	
50 NB	35	140	61.1	16	



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001:2008 CERTIFIED COMPANY