


GLOBE VALVE

OPERATION. - HAND WHEEL OPE.

APPLICABLE STANDARD

DESIGN STD. : API 602
 TESTING STD. : API 598
 LEAKAGE CLASS : CLASS IV
 RATING : 800#
 DRILLING : ANSI B 16.5
 FACE TO FACE : AS PER ANSI B 16.10
 END CONN. : SOCKET WELD/ SCREWED END

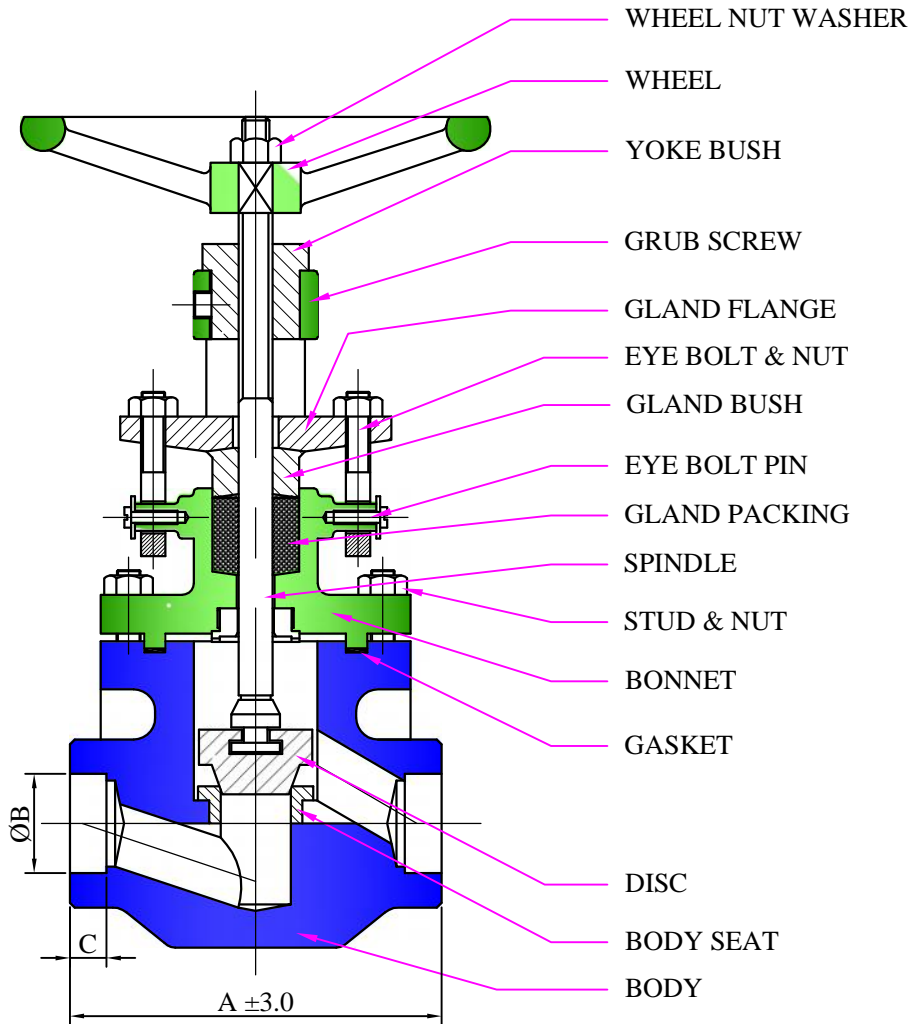

VALVE	SIZE Ø RT	A	Ø B	C	CLASS
15 NB	9	85	21.7	9.5	800 #
20 NB	12.5	92	27.1	13	
25 NB	17.5	104	33.8	13	
40 NB	27	127	48.6	13	
50 NB	35	140	61.1	16	



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001: 2008 CERTIFIED COMPANY