


MOISTURE SEPARATOR

APPLICABLE STANDARD

DESIGN STD.	: MFG STANDARD
TESTING STD.	: API 598
RATING	: 150#/ 300#/ TABLE 'H'
DRILLING	: ANSI B 16.5
FACE TO FACE	: MFG STANDARD
END CONN.	: FLANGED END

FEATURES :

- BODY WITH COVER
- EASILY REMOVABLE FILTERING ELEMENT
- ADEQUATE STRENGTH
- REMOVING PARTICLES, LUMPS, DEBRIS ETC.
- HEAVY GAUGE BASKETS
- LARGE BASKET HOLDS SUFFICIENT SOLIDS
- DIMENSION CAN BE MODIFIED TO SUIT CUSTOMER REQUIREMENTS

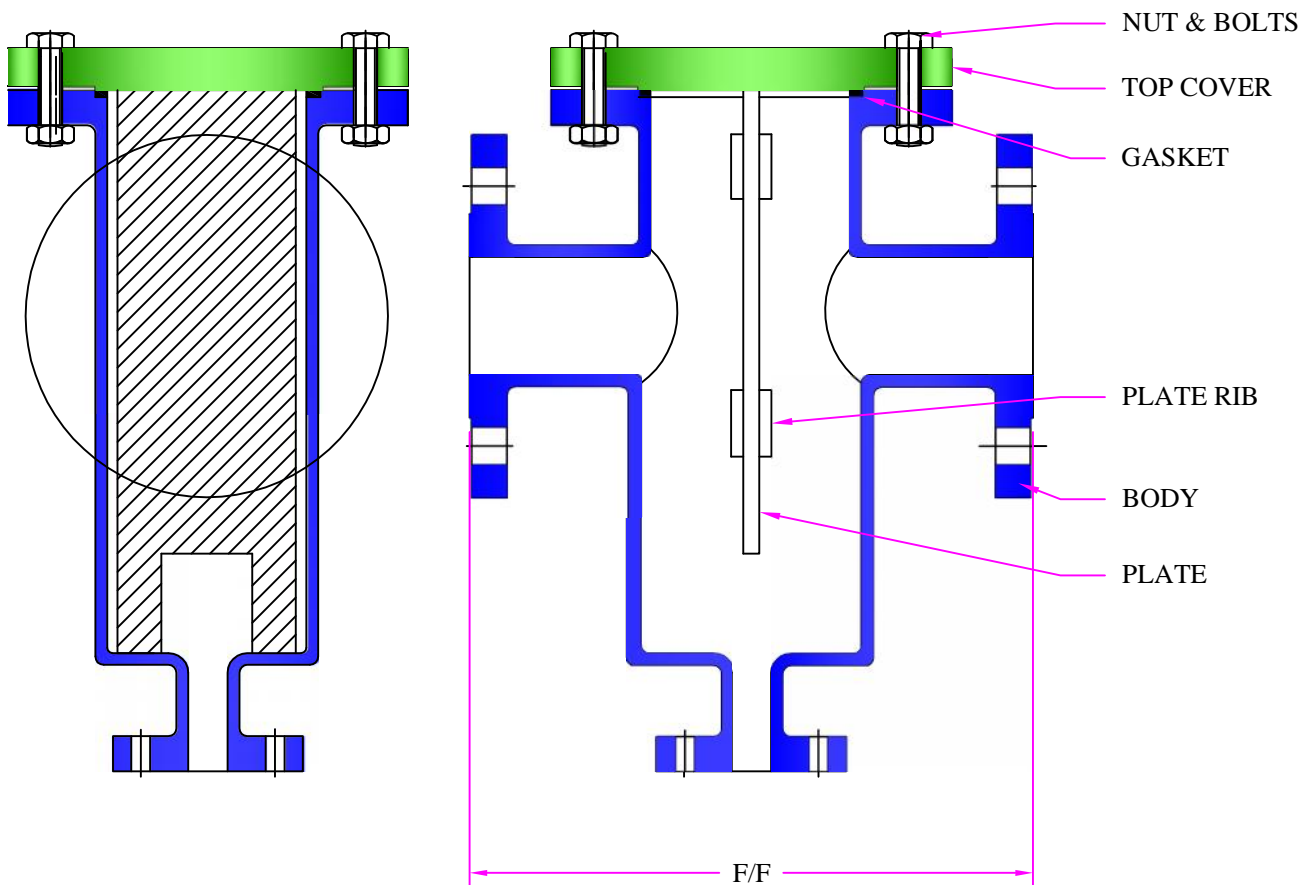

STANDARD

VALVE SIZE - INCH	1"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"
VALVE SIZE - mm	25	40	50	65	80	100	150	200
F/F 150 ANSI	160	200	238	290	310	350	480	600

DESIGN STD.	: MFG. STANDARD
TESTING STD.	: API 598
FACE TO FACE	: MFG. STANDARD
RATING	: 150#, 300#, H - TABLE
DRILLING	: ANSI B 16.5



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001:2008 CERTIFIED COMPANY