
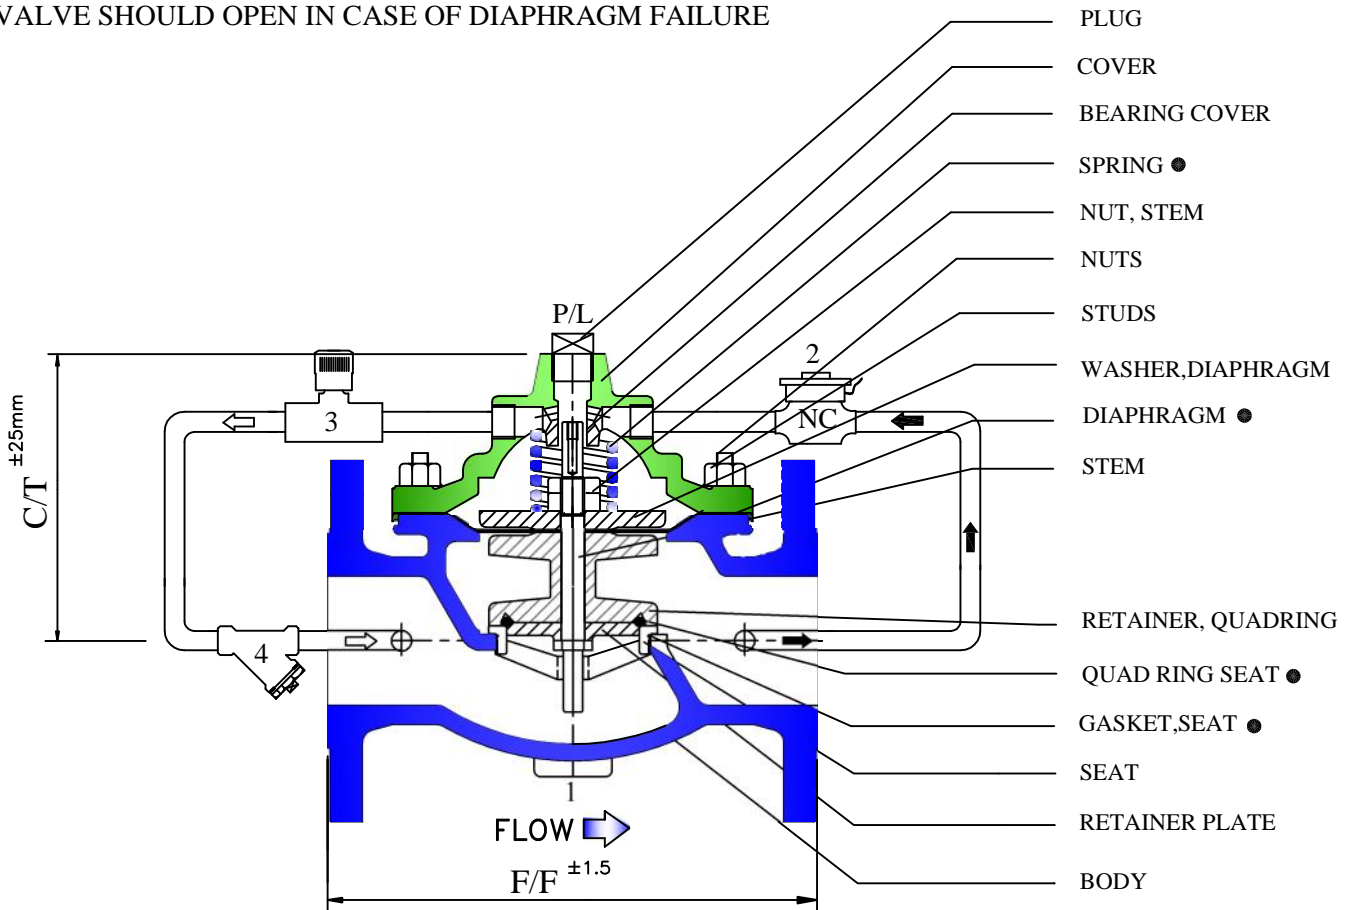


# SOLENOID CONTROL VALVE FT-113

## VALVE FUNCTION

- ELECTRICALLY OPERATED ON/OFF (OPEN/CLOSE) CONTROL VALVE
- ENERGIZED TO OPEN (STANDARD)
- ENERGIZED TO OPEN
- VALVE SHOULD OPEN IN CASE OF DIAPHRAGM FAILURE



- FLOW DIRECTION SHOWN : UNDER THE SEAT ( FIG.-113)
- OPTIONAL 'R' FLOW OVER THE SEAT (FIG.- 113R)

● RECOMMENDED SPARE

VALVE SIZE - INCH	1"	1-1/2"	2"	3"	4"	6"	8"	10"	12"	14"	16"
VALVE SIZE - mm	25	40	50	80	100	150	200	250	300	350	400
F/F (150 ANSI)	152	179	238	305	381	508	645	756	864	991	1051
C/T Max.-F100	75	115	140	175	220	305	400	480	530	570	665

### COMPONENTS

- 1 - BASIC VALVE
- 2 - 2-WAY SOLENOID VALVE (NC)
- 3 - NEEDLE VALVE- Adj. closing speed
- 4 - STRAINER-'Y' TYPE



## FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,  
KATHWADA, AHMEDABAD - 382430  
(M) : 09824080899, 09824539702  
PHONE : (079) 22900220, 22900219  
E-MAIL : info@flowagevalves.com, hemal21386@gmail.com  
url : www.delugecontrolvalve.com, www.flowagevalves.com  
AN ISO 9001:2008 CERTIFIED COMPANY