


# PLUG VALVE (PTFE SLEEVE)

## APPLICABLE STANDARD

DESIGN STD. : BS 5156  
 TESTING STD. : API 598  
 RATING : 150#  
 DRILLING : AS PER ANSI B 16.5  
 FACE TO FACE : AS PER ANSI B 16.10  
 END CONN. : FLANGED END  
 LEAKAGE CLASS : CLASS IV

## FEATURES :

NO LUBRICATION, NO MAINTENANCE COST  
 EXCELLENT SHUT-OFF AND CONTROL PROPERTIES  
 TIGHT SHUT-OFF LIQUIDS AND GASES  
 (LEAKRATE < 10<sup>-6</sup> mbar l/sec)  
 LONG SERVICE - LIFE AT HIGHEST RELIABILITY  
 ECONOMICAL LIFE - CYCLE - COST AT DIFFERENT APPLICATIONS

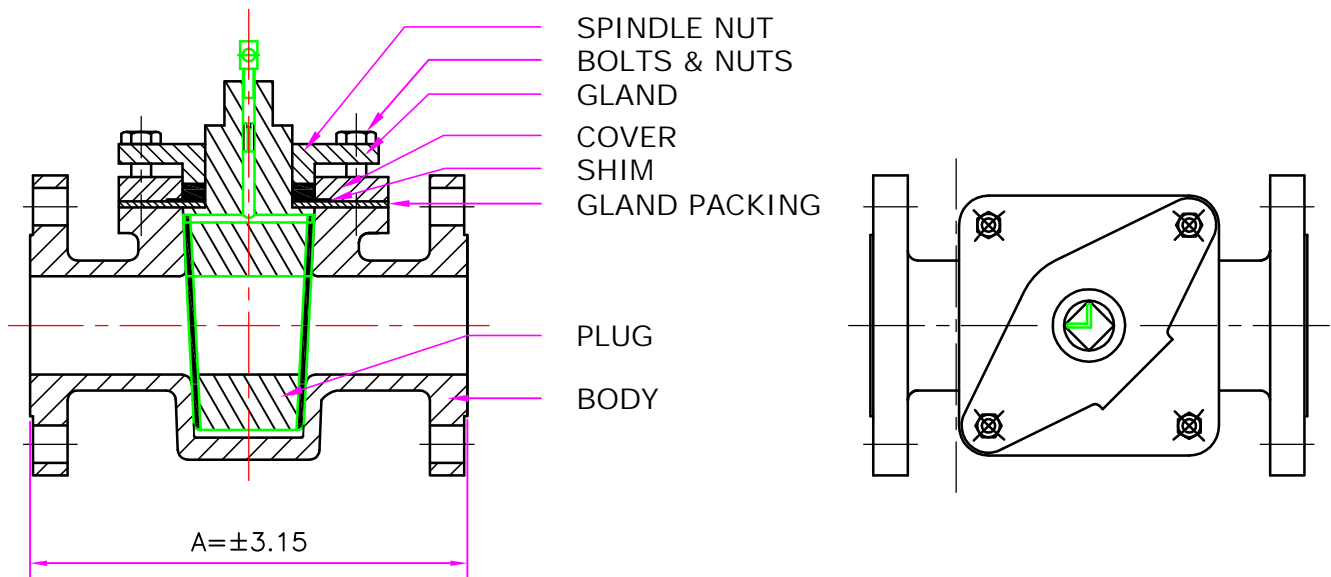

VALVE SIZE - INCH	1"	1.5"	2"	2.5"	3"	4"	6"	8"	10"	12"	
VALVE SIZE - MM	25	40	50	65	80	100	150	200	250	300	
A	150#	127	165	178	190	203	229	267	292	330	356



## FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,  
 KATHWADA, AHMEDABAD - 382430  
 (M) : 09824080899, 09824539702  
 PHONE : (079) 22900220, 22900219  
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com  
 url : www.delugecontrolvalve.com, www.flowagevalves.com  
 AN ISO 9001:2008 CERTIFIED COMPANY