


PRESSURE REDUCING VALVE

MODEL NO.- FT-HP-400

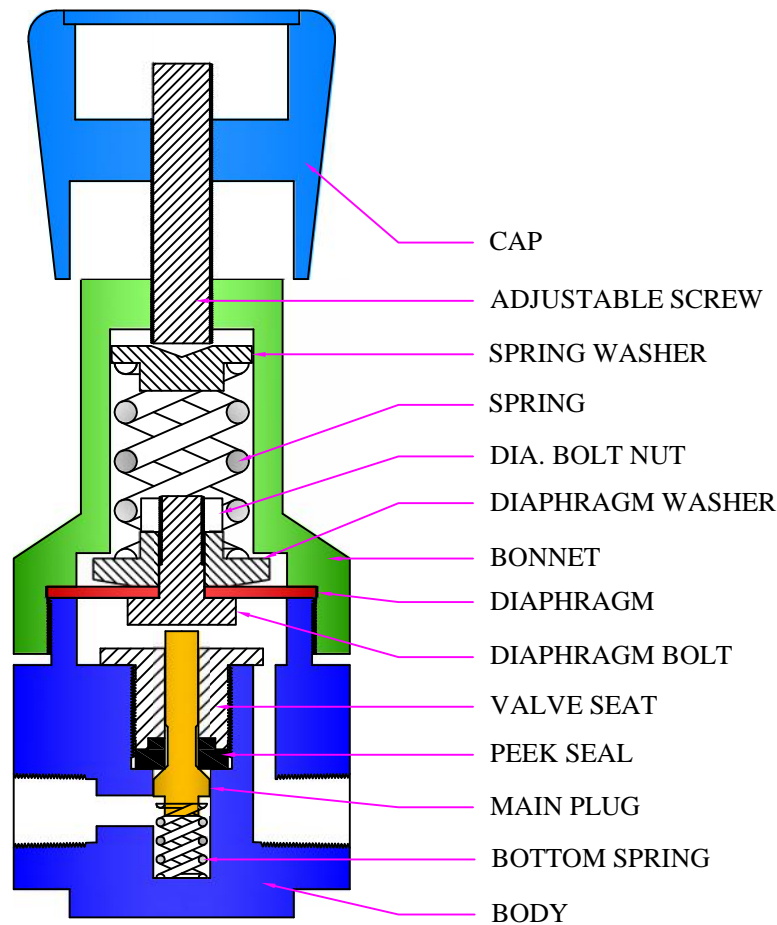

TECHNICAL SPECIFICATION :

Media	:	All gases compatible with material of construction for other media consult with factory.
Inlet Pressure	:	6000 PSIG (Stainless Steel Body)
Outlet Pressure	:	4-50, 4-150, 4-250, 4-500 PSIG
Burst Pressure	:	400% Maximum Operating
Proof Pressure	:	150% Maximum Operating
Material	:	Body - Stainless Steel, Brass
Flow Capacity	:	Cv = 0.08
Ambient operating and fluid media temp.	:	-55°C to 75° C
Port Size	:	1/8", 1/4", 3/8", 1/2" NPTF / BSPF
End Connection	:	Screwed End



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
KATHWADA, AHMEDABAD - 382430
(M) : 09824080899, 09824539702
PHONE : (079) 22900220, 22900219
E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
url : www.delugecontrolvalve.com, www.flowagevalves.com
AN ISO 9001:2008 CERTIFIED COMPANY