


PRESSURE REDUCING VALVE

MODEL NO.- HP-32

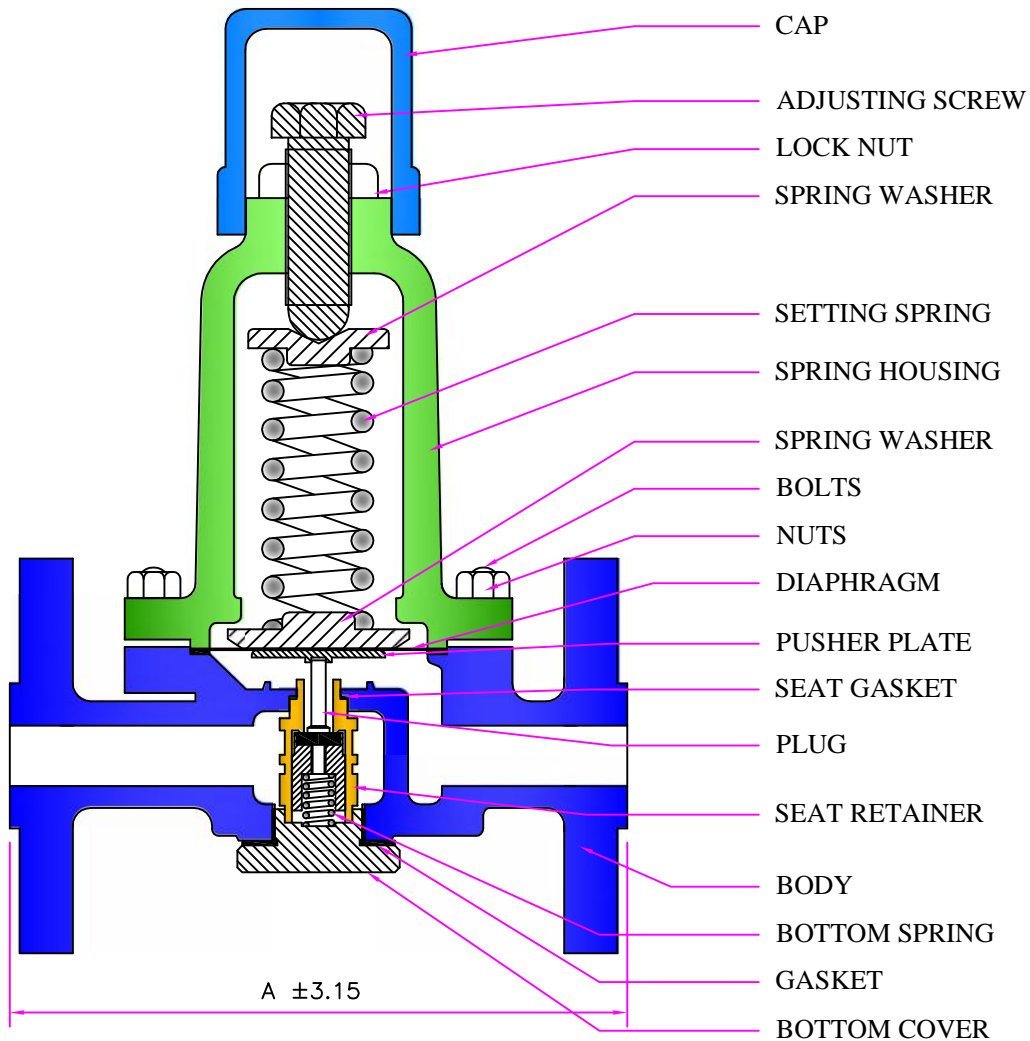

TECHNICAL SPECIFICATION :

1. This Design is suitable for High Pressure Differences.
2. This Valve Operate at Maximum Inlet Pressure 200 Kg/Cm². and Outlet Pressure as per Selection of Spring.
3. End Connection :- Flanged End / Screwed End / Socket Weld
4. Material :- C.S/CF8/CF8M/Alloy Steel
5. Special Construction Possible for Further Higher Pressure.

STANDARD

VALVE SIZE - INCH	1/2"	3/4"	1"	1-1/2"	2"
VALVE SIZE - mm	15	20	25	40	50
A	ND 40	250	250	250	-

LEAKAGE CLASS	: CLASS IV
RATING	: 150#, 300#, 600#
DRILLING	: ANSI B 16.5
FACE TO FACE	: AS PER ANSI B 16.10
END CONN.	: FLANGED END (RF)



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001:2008 CERTIFIED COMPANY