


SAFETY RELIEF VALVE

MODEL NO. - FT-500

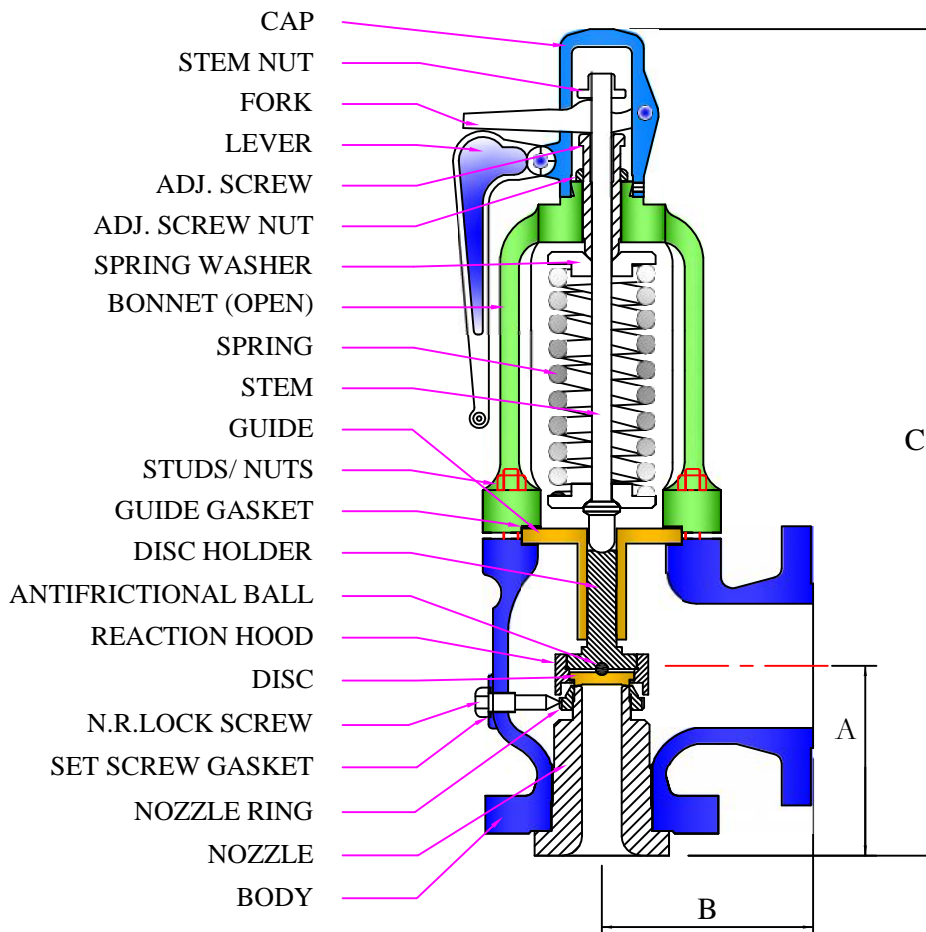

TECHNICAL SPECIFICATION :

1. Full Nozzle, full lift Safety Valve.
2. Pressure Range :- 5.0 to 6500.0 PSI.
3. End Connection :- Flanged End(As per ANSI B16.5)
4. Inlet Size :- 1"x2" TO 10"x14"
5. Material :- C.S/ CF3/ CF3M/ CF8/ CF8M/ Alloy Steel
6. Inlet x Outlet Rating :- 150#/ 300#/ 600#/ Table-H x 150#/ 300#/ Table-E
7. Temperature Range :- 450°F to 1500°F
8. Seat Type :- Metal to Metal [STELLITED]Soft Seat with PTFE & Viton

VALVE SIZE - INCH	1" x 1"	1-1/2" x 2"	1-1/2" x 2-1/2"	1-1/2" x 3"	2" x 3"	2-1/2" x 4"	3" x 4"	4" x 6"	6" x 8"	8" x 10"	10" x 14"
VALVE SIZE - mm	25 x 25	40 x 50	40 x 65	40 x 80	50 x 80	65 x 100	80 x 100	100 x 150	150 x 200	200 x 250	250 x 350
A	105.0	124.0	124.0	130.0	133.0	136.5	155.0	181.0	240.0	276.0	380.0
B	114.5	120.5	120.5	124.0	124.0	143.0	162.0	229.0	241.0	280.0	370.0
C	450.0	505.0	505.0	530.0	575.0	595.0	620.0	950.0	1250.0	1450.0	1600.0



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001:2008 CERTIFIED COMPANY