

# GLOBE TYPE CONTROL VALVES SINGLE

## SEAT - TOP GUIDED (AIR TO OPEN)


### TECHNICAL SPECIFICATION :

The Model 729 is a single seated top-guided globe type control valve. differential and it is very stable valve. Quite suitable for steam, thermic fluid etc.it is available in various type of plug contours such as equal percentage, linear, quick opening, metering pin to suit specific requirements. The valve can be actuated by spring & diaphragm or electric actuator. and Reverse (air to open) actuator.

Size Range : 1" (25mm) to 8" (200mm)

MODEL NØ29

Rating : 150 , 300 & 600 Class.

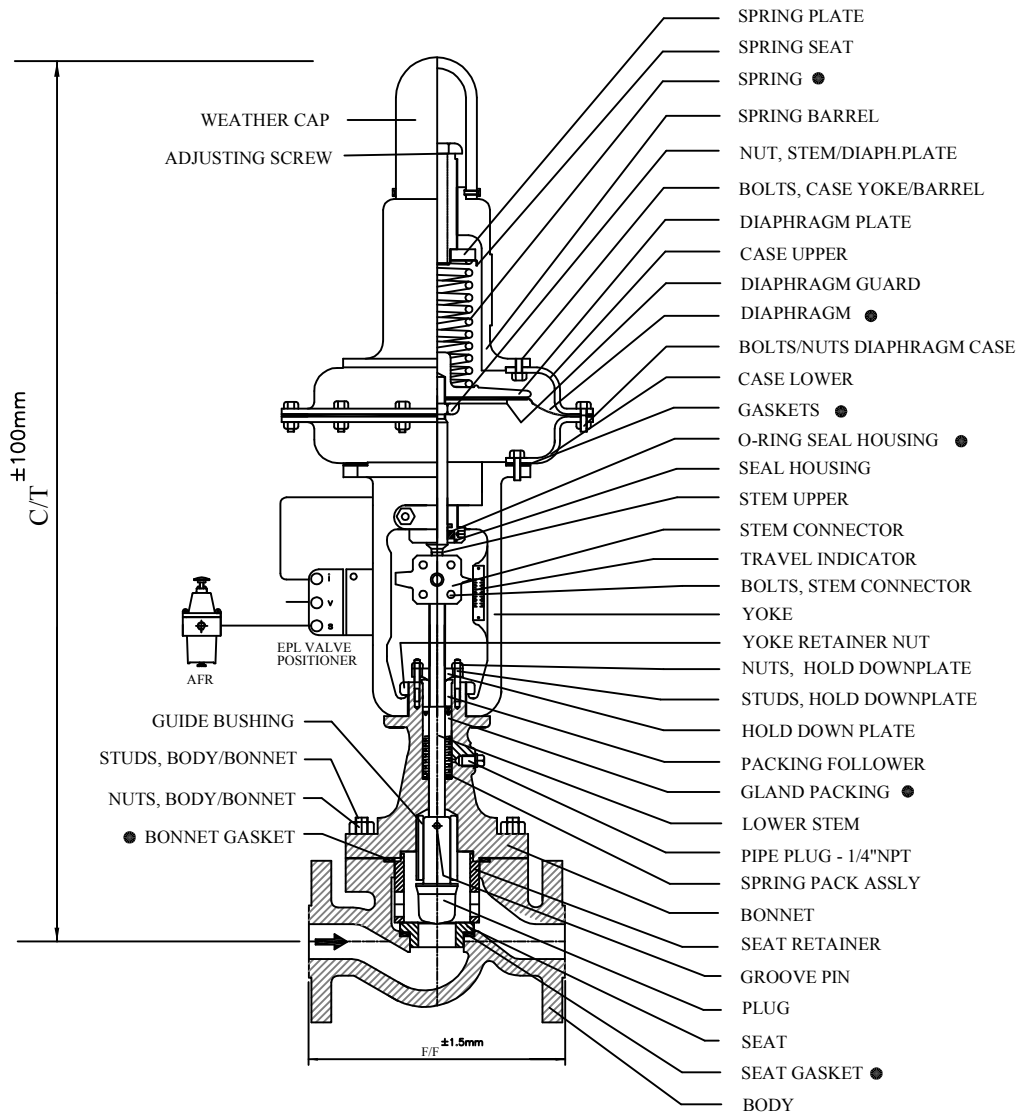

VALVE SIZE - INCH	1"	1-1/2"	2"	3"	4"	6"	8"
VALVE SIZE - mm	25	40	50	80	100	150	200
F/F 150 ANSI	184	222	254	298	352	450	543
C/T	680	700	730	930	1050	1215	1315

● RECOMMENDED SPARE



### FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,  
 KATHWADA, AHMEDABAD - 382430  
 (M) : 09824080899, 09824539702  
 PHONE : (079) 22900220, 22900219  
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com  
 url : www.delugecontrolvalve.com, www.flowagevalves.com  
 AN ISO 9001:2008 CERTIFIED COMPANY