


THERMAL RELIEF VALVE

MODEL NO. - FT-110

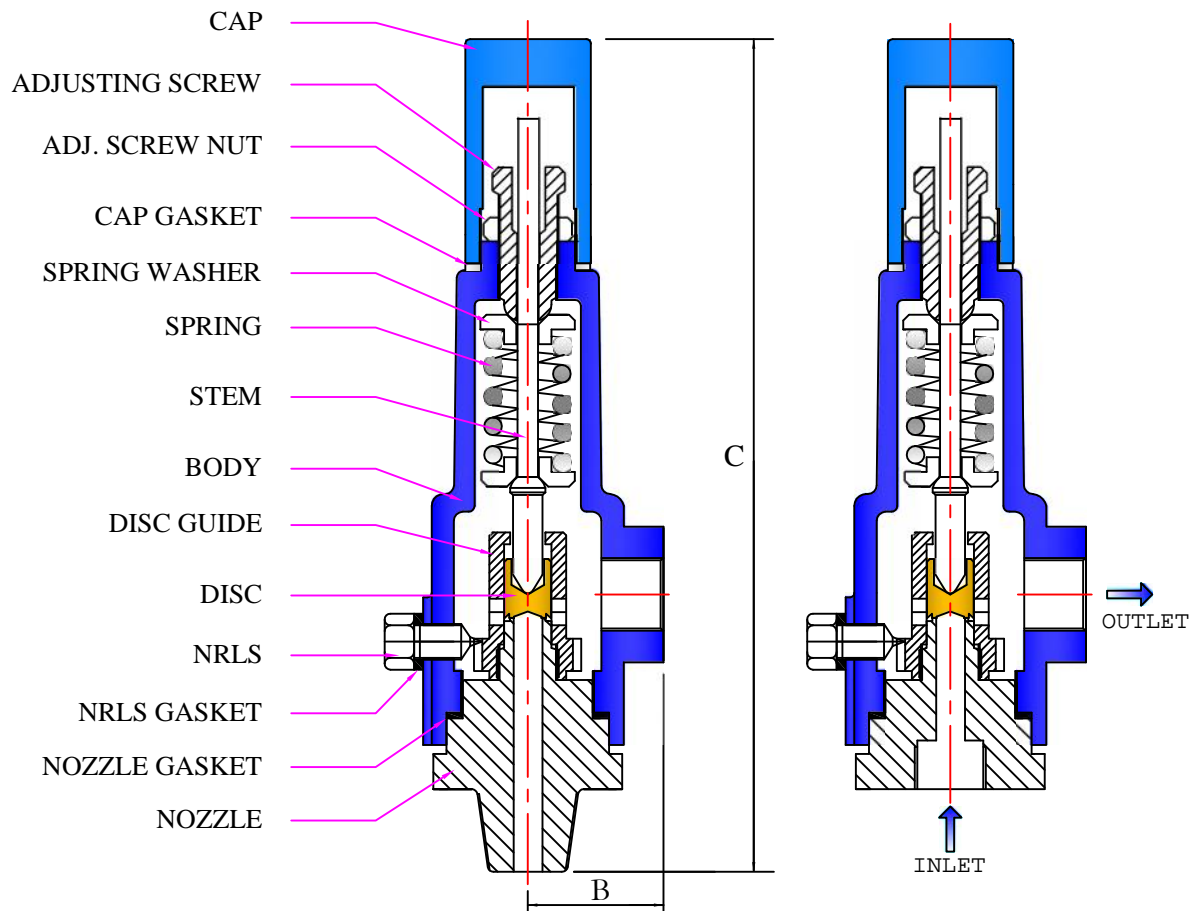

TECHNICAL SPECIFICATION :

1. Built in Conformance to ASME code section / API for Air, Gas, Steam and Liquid Service.
2. Pressure Range :- 0.5 to 10,000 PSI.
3. End Connection :- Screwed End NPT/BSP(M x F) & Socket Weld
4. Material :- C.S/ CF3/ CF3M/ CF8/ CF8M/ Alloy Steel
5. Modified Nozzle Safety Relief Valve.
6. Special Construction Possible for Further Low Pressure.
7. Longer life span of optional bellows through integrated shielding

VALVE SIZE - INCH	1/2" x 3/4"	3/4" x 1"	1" x 1"	1" x 1-1/2"	1-1/2" x 2"	2" x 2"
VALVE SIZE - mm	15 x 20	20 x 25	25 x 25	25 x 40	40 x 50	50 x 50
A	105.0	105.0	105.0	105.0	105.0	95.0
B	50.0	50.0	50.0	50.0	80.0	70.0
C	275.0	275.0	275.0	275.0	290.0	330.0



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001:2008 CERTIFIED COMPANY