


SAFETY RELIEF VALVE

MODEL NO. - FT-116

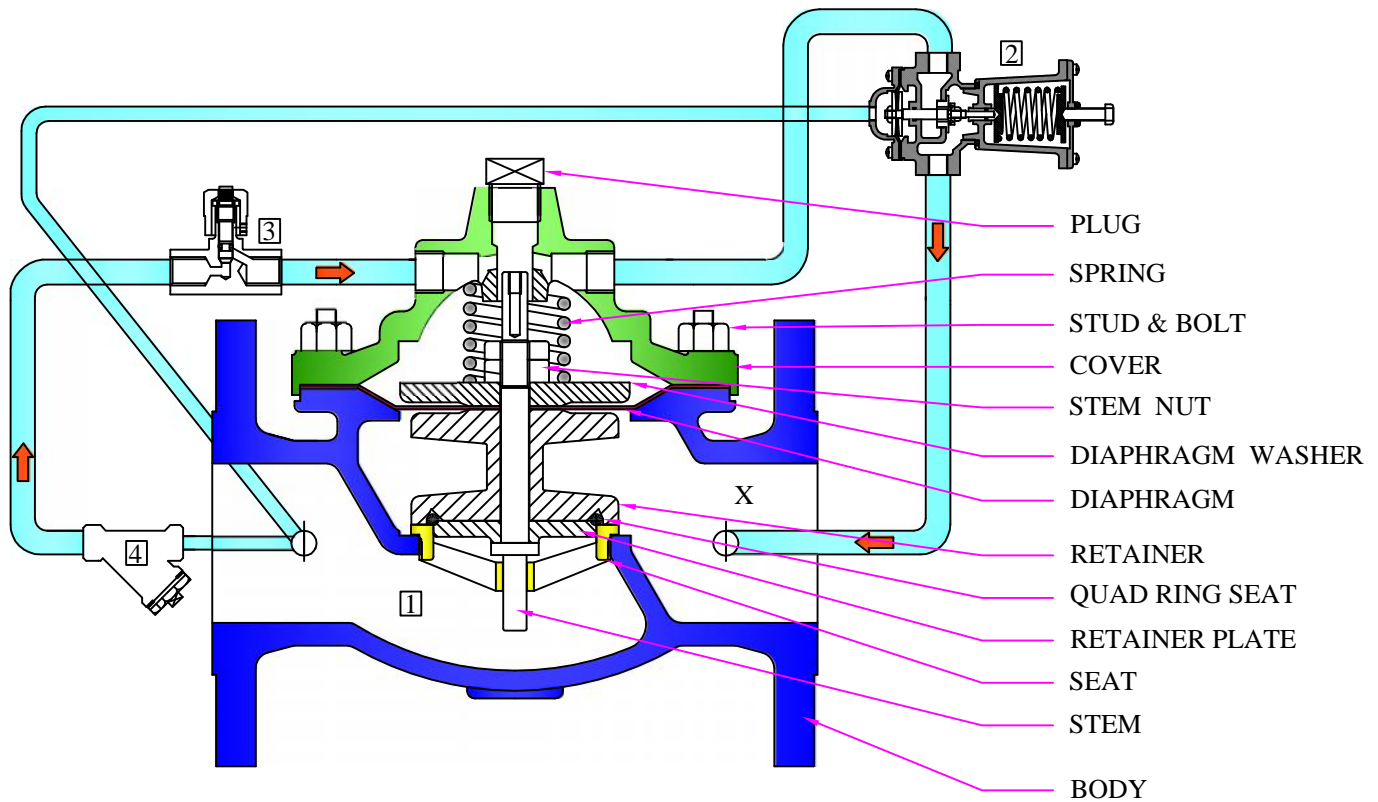

COMPONENTS :

- 1 - BASIC VALVE
- 2 - FIG.16 RELIEF CONTROL
- 3 - NEEDLE VALVE
- 4 - STRAINER-`Y' TYPE

TECHNICAL SPECIFICATION :

- MAINTAINS CONSTANT UPSTREAM PRESSURE (INLET TO OUTLET) BY RELIEVING EXCESS PRESSURE
- Material : C.S/ CF3/ CF3M/ CF8/ CF8M/ Alloy Steel
 End Connection : Flanged End

VALVE SIZE - INCH	1"	1-1/2"	2"	3"	4"	6"	8"	10"	12"	14"	16"
VALVE SIZE - mm	25	40	50	80	100	150	200	250	300	350	400
F/F 150 ANSI	152	179	238	305	381	508	645	756	864	991	1051



FLOW-TEK VALVES & CONTROLS INC

PLOT NO: 172-173, ROAD NO. 4, G.I.D.C.,
 KATHWADA, AHMEDABAD - 382430
 (M) : 09824080899, 09824539702
 PHONE : (079) 22900220, 22900219
 E-MAIL : info@flowagevalves.com, hemal21386@gmail.com
 url : www.delugecontrolvalve.com, www.flowagevalves.com
 AN ISO 9001:2008 CERTIFIED COMPANY