
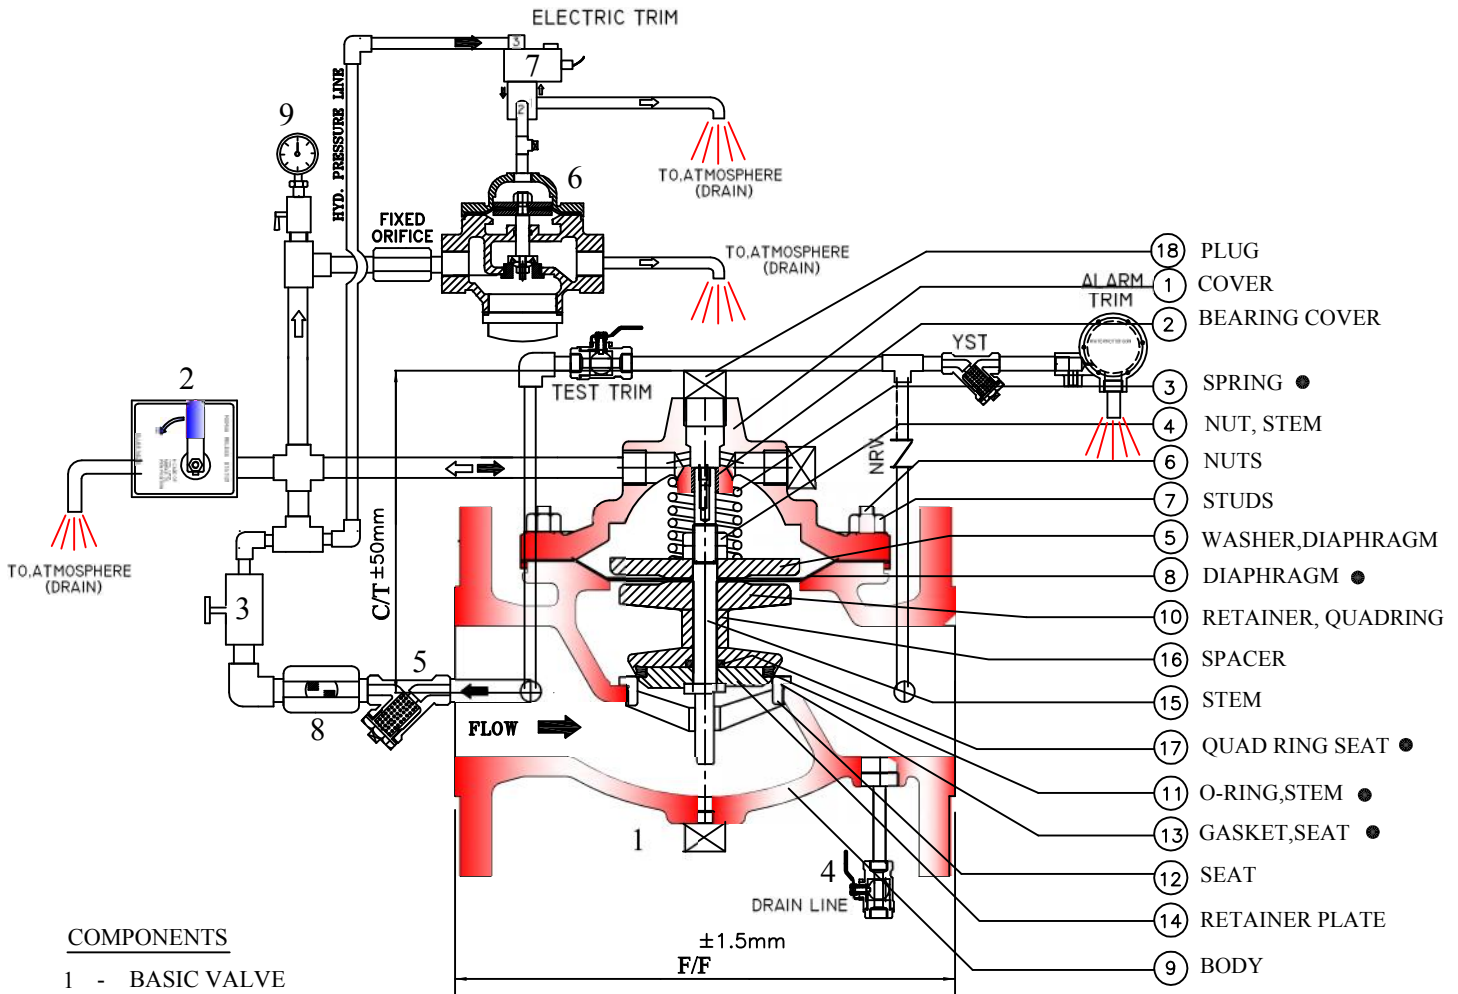


DELUGE VALVE (HYD.) ELECTRICAL CONTROL/SOLENOID-ON-OFF VALVE FTV-ACV-100 (GLOBE TYPE) WITH SPRINKLER SYSTEM

AUTOMATIC CONTROL VALVE SCHEMATIC

TECHNICAL SPECIFICATION :

- VALVE OPENS WHEN SOLENOID ENERGIZED.
- VALVE CLOSSES WHEN SOLENOID DE-ENERGIZED.
- M.R. STATION PROVIDES MANUAL OVERRIDE OF CONTROLS.



COMPONENTS

- 1 - BASIC VALVE
- 2 - M.R. STATION
- 3 - FLOW CONTROL DEVICE
- 4 - **OUTLET DRAIN VALVE**
- 5 - Y-TYPE STRAINER
- 6 - 100M PILOT
- 7 - 3/2 WAY SOLENOID VALVE (NO) NON-EX-PROOF
- 8 - NRV
- 9 - PRESSURE GAUGE

VALVE SIZE - INCH	3"	4"	6"	8"
VALVE SIZE - mm	80	100	150	200
F/F (150 ANSI)	305	381	508	645
C/T Max.-F100	175	220	305	400
VALVE SIZE :- 4"(100MM) , 6"(150MM) , 8"(200MM) UL- LISTED				

● RECOMMENDED SPARE

FLOW TEK VALVES & CONTROLS INC

PLOT NO-172-173, ROAD NO-4 KATHWADA.G.I.D.C. AHMEDABAD - 382430

PHONE : (079) 22900219 , 22900220 , +91-9824539702, 9824080899

E-MAIL : <INFO@FLOWAGEVALVES.COM>

WEBSITE : HTTP://WWW.FLOWAGEVALVES.CO