
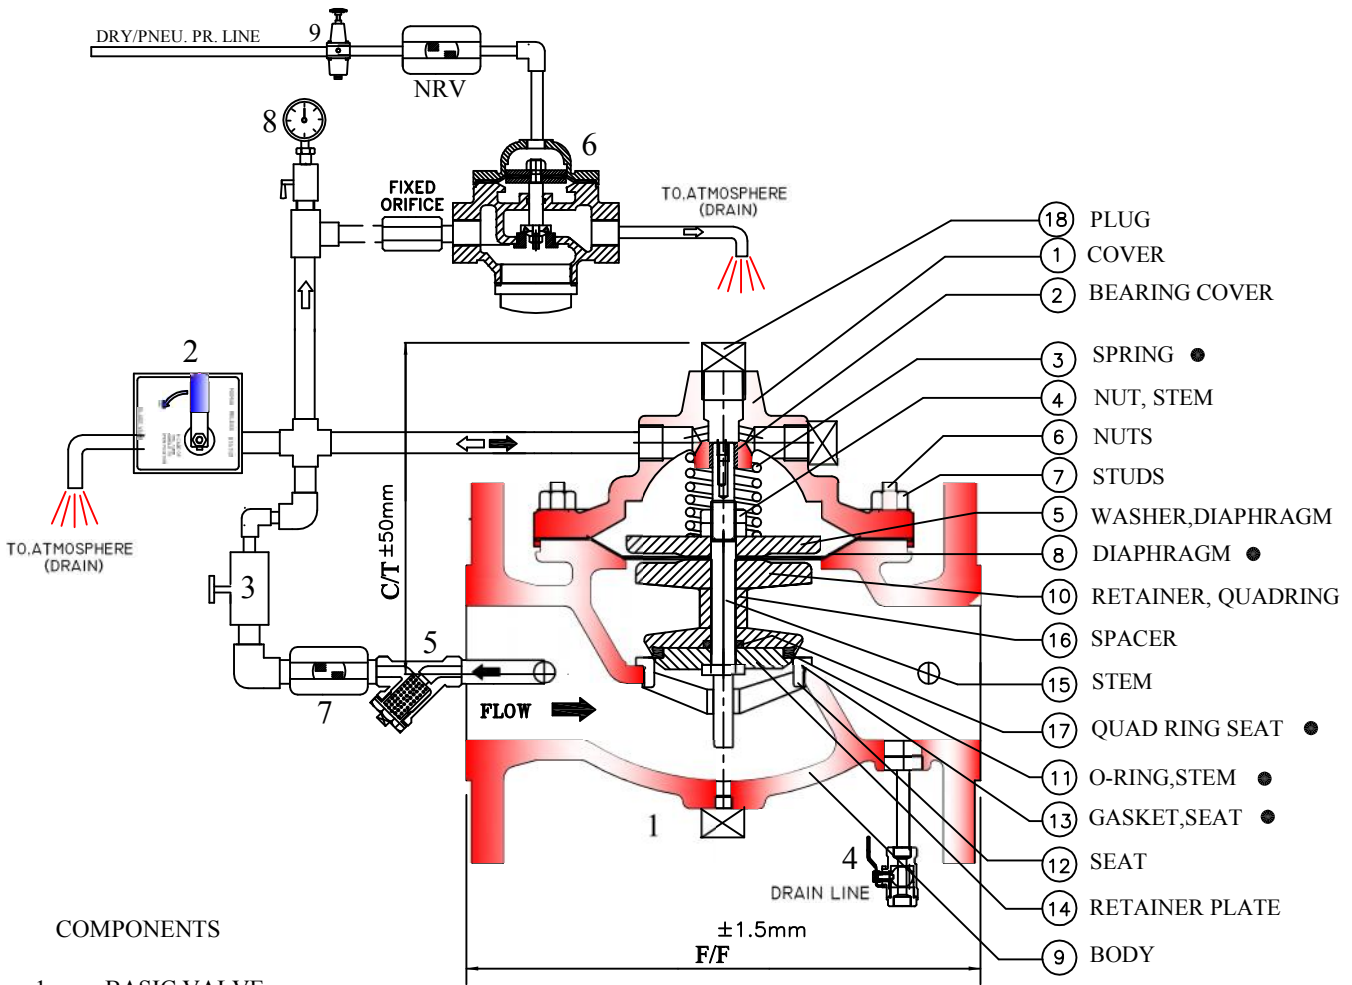


# PNEUMATIC/ON-OFF DELUGE VALVE FTV-ACV-100 (GLOBE TYPE)

## AUTOMATIC CONTROL VALVE SCHEMATIC

### TECHNICAL SPECIFICATION :

- Valve closes when Pneu.Air pressure is applied to the cover of control 6.
- Valve Opens when Pneu. Air pressure is relieved from the cover of control 6.
- Manual by-pass allows manual opening of the valve.



#### COMPONENTS

- 1 - BASIC VALVE
- 2 - M.R. STATION
- 3 - FLOW CONTROL DEVICE
- 4 - **OUTLET DRAIN VALVE**
- 5 - Y-TYPE STRAINER
- 6 - 100M PILOT
- 7 - NRV
- 8 - PRESSURE GAUGE
- 9 - AIR FILTER REGULATOR

VALVE SIZE - INCH	2"	3"	4"	6"	8"	10"	12"	14"	16"
VALVE SIZE - mm	50	80	100	150	200	250	300	350	400
F/F (150 ANSI)	238	305	381	508	645	756	864	991	1051
C/T Max.-F100	140	175	220	305	400	480	530	570	665

● RECOMMENDED SPARE

## ***FLOW TEK VALVES & CONTROLS INC***

PLOT NO-172-173, ROAD NO-4 KATHWADA.G.I.D.C. AHMEDABAD - 382430

PHONE : (079) 22900219 , 22900220 , +91-9824539702, 9824080899

E-MAIL : <INFO@FLOWAGEVALVES.COM>

WEBSITE : HTTP://WWW.FLOWAGEVALVES.COM